



PMC WATER SYSTEMS SERVICES INC.

124 CONNIE CRES. UNIT 9 CONCORD, ONTARIO.


TEL 905 669 8262, FAX 905 669 8252, EMAIL pmcwater@aol.com, www.pmcwatersystems.com

B-3005-D

STEAM BOILER WATER TREATMENT

APPLICATION:

PMC B-3005-D is a concentrated liquid blend of corrosion and scale inhibitors specially formulated for low pressure (less than 100 psi/700 kPa) steam boiler systems. B-3005-D provides complete treatment for boilers and condensate return systems. B-3005-D will treat feed water containing up to 5 ppm total hardness. B-3005-D combines Ter-polymer acrylates, organic phosphates and natural organics for sludge conditioning. DEHA & Molybdate are used for durable protection of the boilers metal surfaces and antifoam for prevention of carryover.

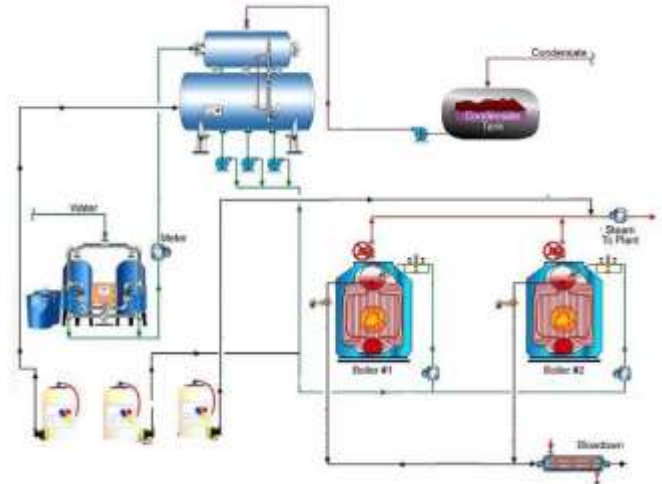

BENEFITS:

- * One product treatment program
- * Prevents energy robbing scale formations.
- * Protects against pitting and condensate corrosion.
- * Easy to monitor and control.

FEEDING AND CONTROL:

PMC B-3005-D should be fed continuously using proportional feed equipment.

PMC B-3005-D should be fed to the boiler feed water tank or feed water system.

PMC B-3005-D feed rates may be controlled using a single Molybdenum test.

Consult your PMC Water Systems consultant for specific control parameters and feed rates.

PRECAUTIONS:

Study Material Safety Data Sheet.

PACKAGING:

| | |
|---------------|--------|
| Plastic pails | 25 KG |
| Poly drums | 220 KG |