




B-3402

STEAM BOILER WATER TREATMENT

APPLICATION:

PMC B-3402 is a concentrated liquid blend of corrosion and scale inhibitors specially formulated for low pressure (less than 100 psi/700 kPa) steam boiler systems. B-3402 provides complete treatment for boilers systems. B-3402 will treat feedwater containing up to 10 ppm total hardness. B-3402 combines acrylates, organic phosphates and natural organics for sludge conditioning. It also contains sulphite for oxygen scavenging, phosphonates for scale control, and antifoam for prevention of carryover.

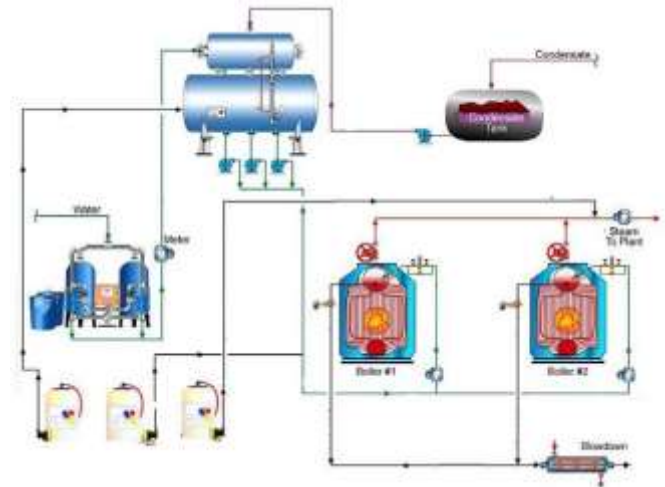

BENEFITS:

- * One product treatment program
- * Prevents energy robbing scale formations.
- * Protects against pitting and corrosion.
- * Easy to monitor and control.

FEEDING AND CONTROL:

PMC B-3402 should be fed continuously using proportional feed equipment.

PMC B-3402 should be fed to the boiler feedwater tank or feedwater system.

PMC B-3402 feed rates may be controlled using a single sulphite test.

Consult your PMC Water Systems consultant for specific control parameters and feed rates.

PRECAUTIONS:

Study Material Safety Data Sheet.

PACKAGING:

Plastic pails	25 KG
Poly drums	230 KG